ROYALÉ TOUCHÉ
PERFORMANCE PLY

PLYWOOD | BLOCK BOARD | DOORS

WHERE ROYALTY MEETS STRENGTH & DURABLILITY



ROYALÉ TOUCHÉ
PERFORMANCE PLY

At Royale Touche, we believe that doors are more than just an entrance — they are a reflection of your lifestyle and taste. Every Royale Touche Door is crafted to perfection, offering unmatched strength, long-lasting beauty, and performance that defines true luxury.

Super Craftsmanship

Each Royale Touche Door is engineered with precision using carefully selected high density southern yellow pine timber and advanced manufacturing technology. Our doors deliver a flawless surface finish, are resistant to warping, swelling, and daily wear — ensuring your home looks as pristine as the day it was built.

Termite and Borer Protection

Built to endure, Royale Touche Doors are treated with specialized formulations that provide complete protection from termites and borers. This ensures long-term durability and a worry-free experience for years to come.

Climate Stability


Whether it's humid summers or dry winters, Royale Touche Doors maintain their shape and strength. Our advanced climate-stable technology minimizes expansion and contraction, keeping your doors perfect in any weather.

Safety and Reliability

Royale Touche Doors are designed for real-life performance — slam resistant, fire-safe, and engineered to withstand repeated use without compromise.

Our commitment to safety and quality ensures your home remains secure, elegant, and welcoming.

ROYALÉ TOUCHÉ
PERFORMANCE PLY

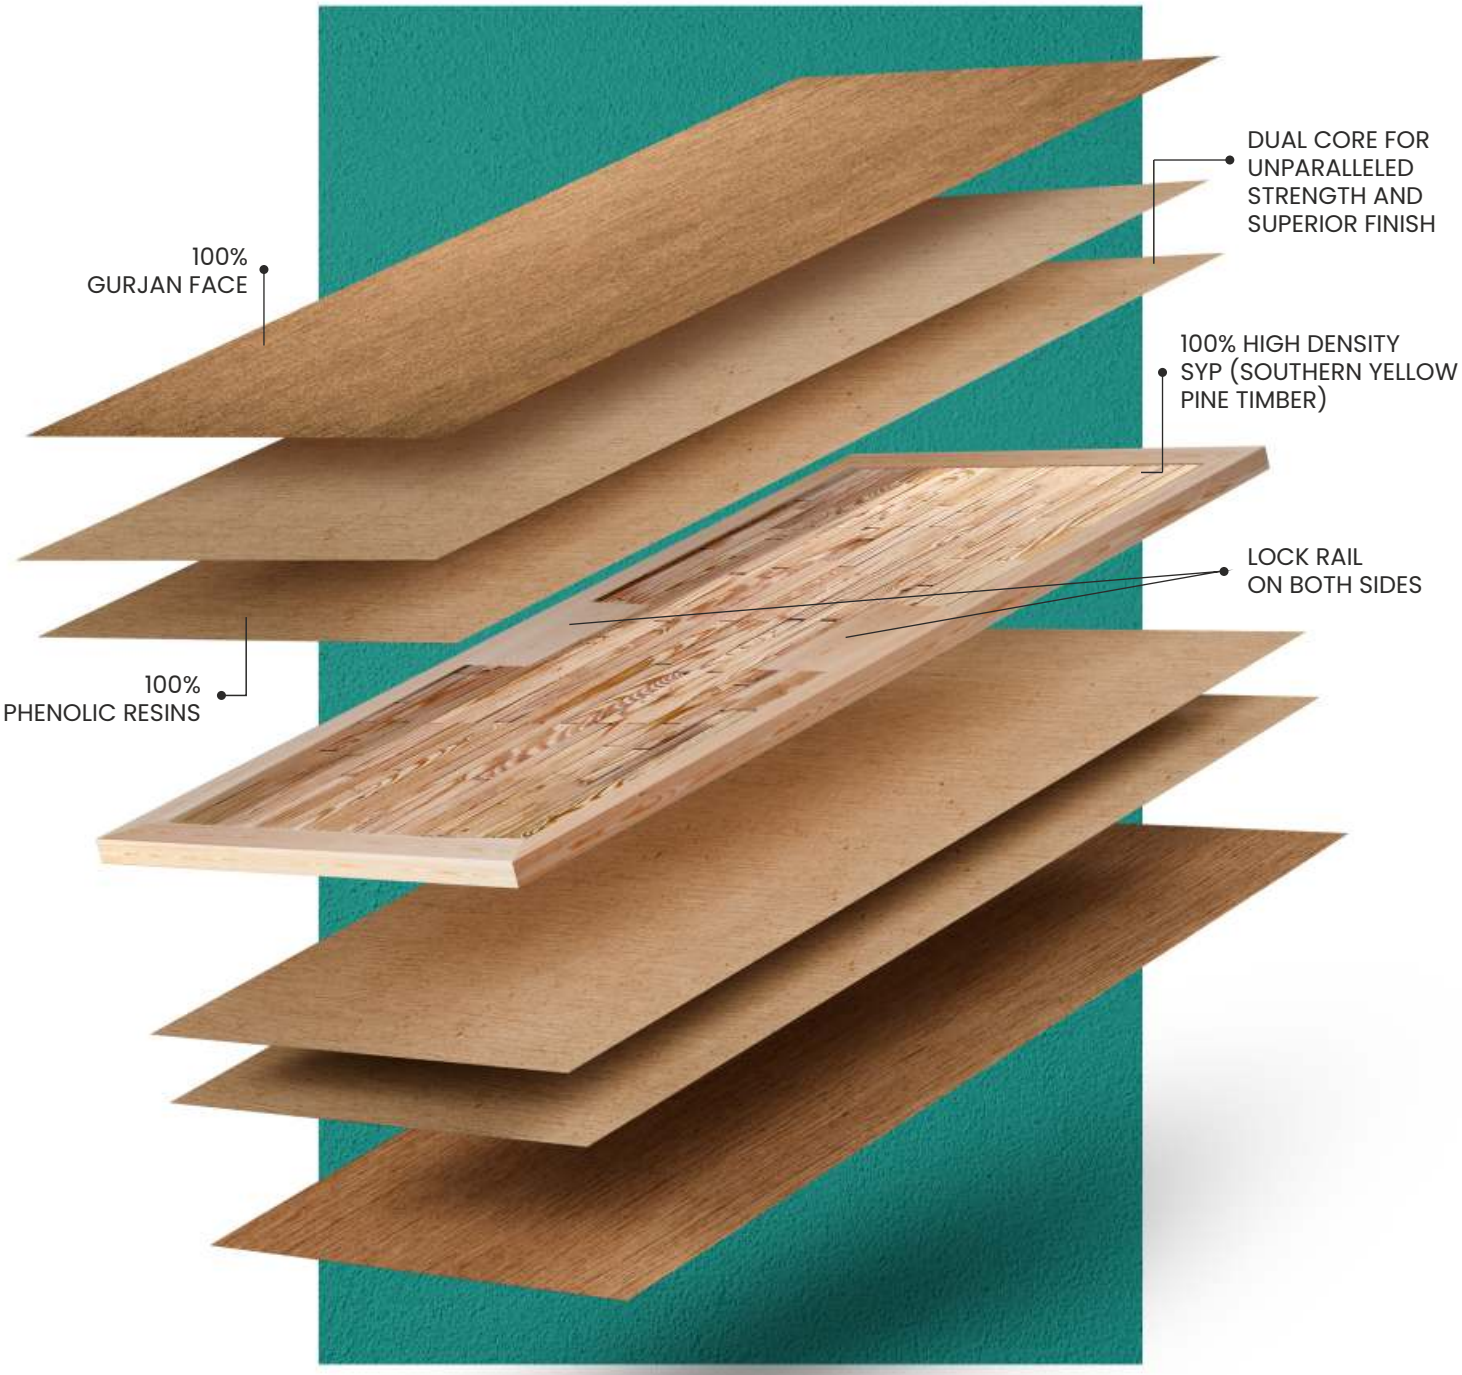


1ST TO USE

- 100% SOUTHERN YELLOW PINE**(SYP)** IMPORTED FROM THE **US**.
- **100% GURJAN FACE** FOR **SUPERIOR FINISH.**

WHY ROYALE TOUCHE DOORS ?

- 100% US ORIGIN SOUTHERN YELLOW PINE(SYP)
- 100% PLC SEASONED TIMBER
- E-O EMISSIONS
- FIRE SAFE
- 100 % BOILING WATER PROOF
- CLIMATE STABLE
- TERMITE & BORER PROOF
- LIFETIME WARRANTY

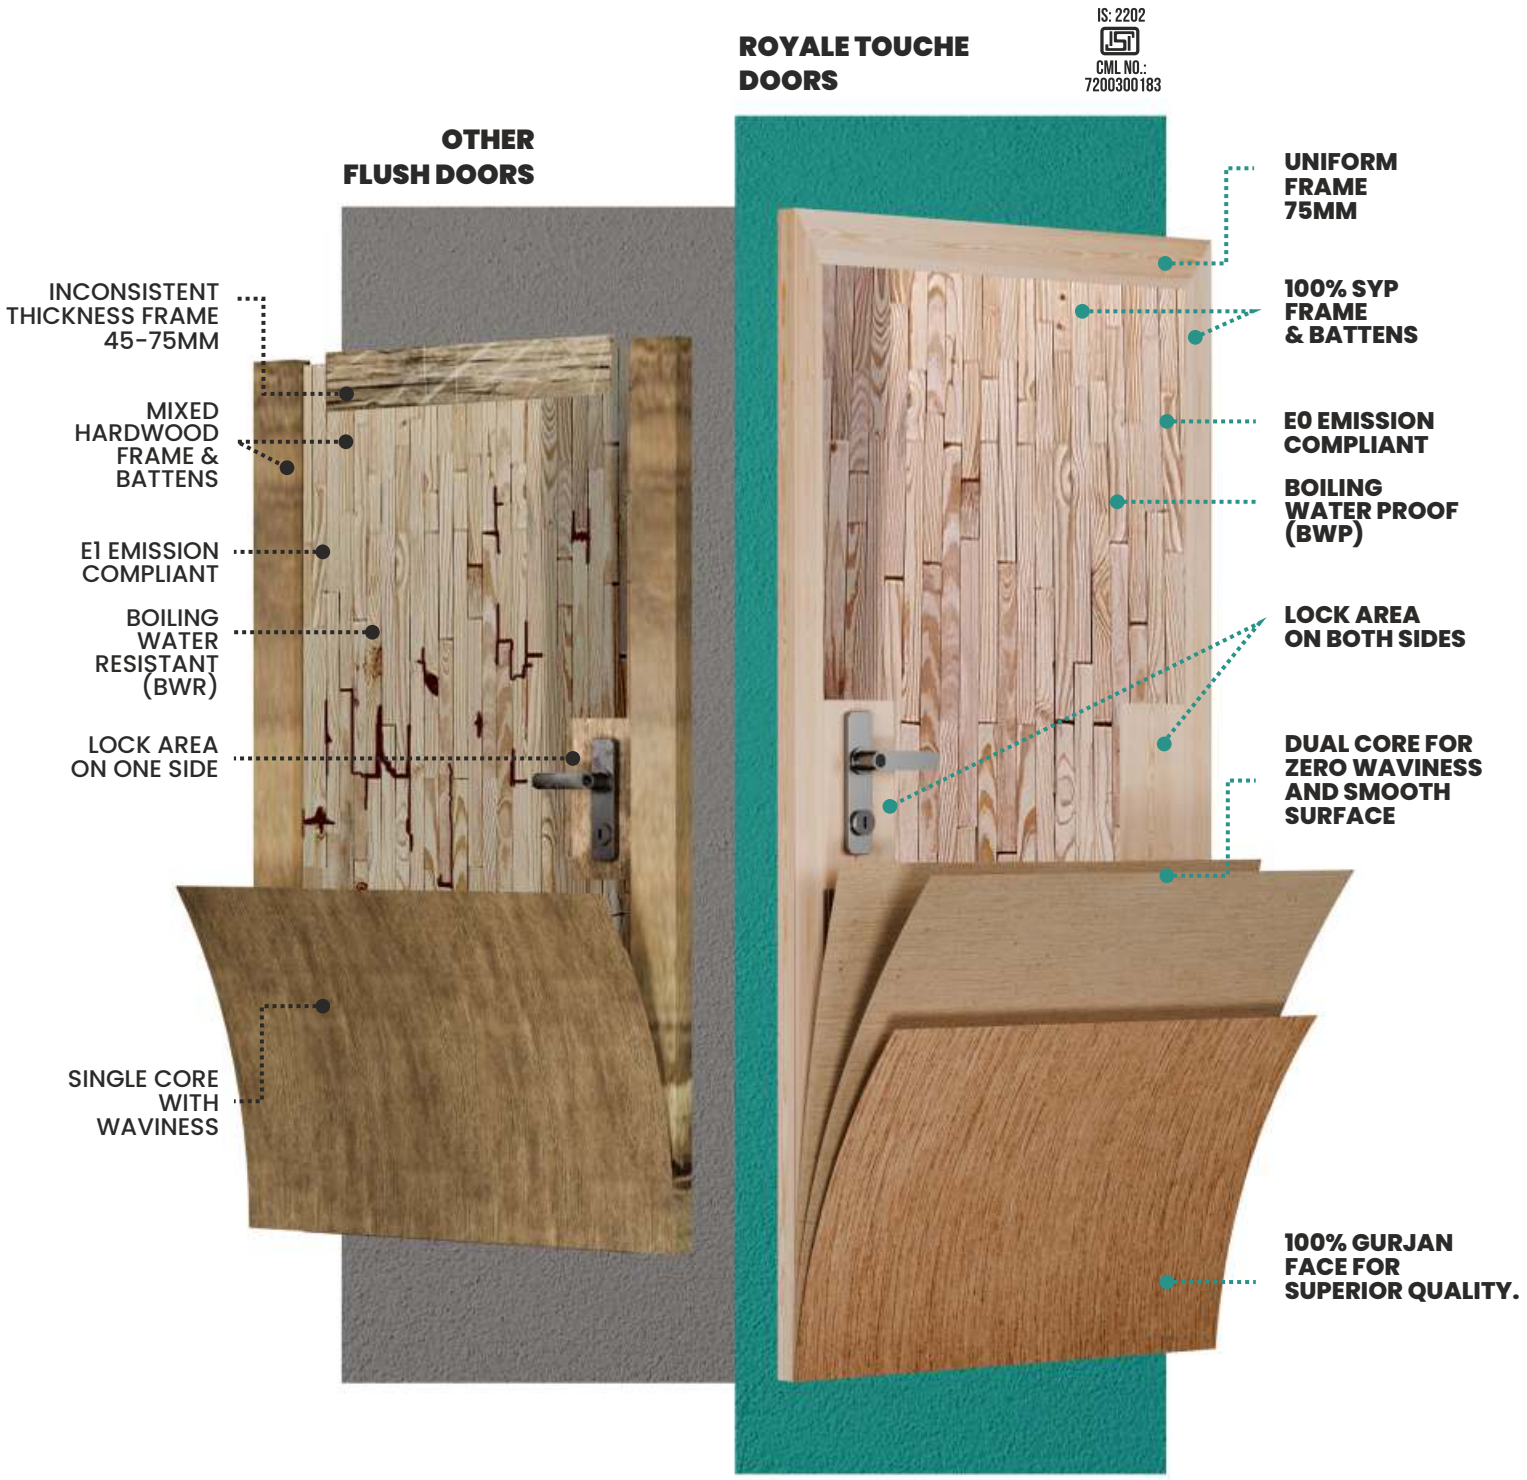



THE **ROYALE TOUCHE** PROMISE

LUXURY, STRENGTH & PRECISION

FEATURE	ROYALE TOUCHE	OTHER BRANDS	LOCAL BRANDS
FACE	Gurjan	Okume	Okume/Recon
WATERPROOF	100% Boiling waterproof(BWP)	BWP/BWR/MR	BWR/MR
WAVINESS	100% Dual core with zero waviness	Waviness in some variants	Single core with waviness
IN HOUSE PRODUCTION	100% In house production	Only in some variants	-
FRAME SIZE	75MM or more	45-75MM	Smaller and inconsistent frame size
FILLER	100% southern yellow pine	Mix hardwood	Mix softwood and hardwood
LOCK AREA	On both sides	Both sides in some variants	Single Side
CALIBRATED	100% Calibrated	In some variants	Uncalibrated

TECHNICAL SPECIFICATION

ROYALÉ TOUCHÉ
PERFORMANCE PLY

HEIGHT & WIDTH	H +2MM | W +2MM
Moisture Content	10-12%
Density (Kg/m3)	650
Flatness of Shutter (Twisting, cupping and warping)	Not more than 1 mm
Local Planeness (surface smoothness)	Not more than 0.5 mm
Impact Indentation	Not more than 0.1 mm by a weight of 0.5 kg
Flexure Resistance (residual deflection)	Not more than 2 mm
Edge loading a) Residual deflection b) Lateral buckling	Not More than 0.2 mm Not More than 1.5 mm
Shock Resistance	No visible damage after 30 blows of 5 kg
Buckling Resistance a) Initial deflection b) Residual Deflection	Not more than 40 mm Not more than 5 mm
Slamming of Shutter	No visible impact after 30 impacts of 15 kg
Misuse of the Shutter	No permanent deformation after the test
Varying Humidity	Dimensional changes within 4%
End Immersion	No delamination after immersion
Adhesion of Plies	Excellent
Glue Adhesion	No delamination of the glue line
Screw Holding Strength	>250(kg)
Preservative Treatment	4 tier treatment
Water absorption	<1%
Nail Holding Strength	>150(kg)

ROYALÉ TOUCHÉ
PERFORMANCE PLY

"QUALITY
ISN'T AN OPTION.
IT'S OUR
COMMITMENT -
BUILT INTO
EVERY DOOR
WE MAKE."

Royale Touche Industries Pvt. Ltd.,
One 42, 401 North Tower, Near Jayantilal Park BRTS,
Ambli-Bopal Road, Ahmedabad, Gujarat, India - 380058
Call: +91 79 4750 7600 | +91 79 4001 7979
Email: sales@royaletouche.com